



Expansion Joint Covers

Introducing *NEW* **Restofit™**

*Taking on joint pain,
one joint cover
at a time.*

C/S **Restofit™** Joint Systems are ready to tackle your worst expansion joint areas.



If these pictures look familiar, give us a call.
(or send us your own pictures to restofit@c-sgroup.com)

Restofit™ Joint Systems provide refreshing options for worn out and broken down expansion joint covers. All options are easy to install and require minimal down time for your facility, saving you time and money.

Classic Restofit™ Model Options

All C/S Restofit™ models are designed for quick and easy installation in both new and retrofit applications. Requiring little maintenance, Restofit™ models are suitable for a variety of floor finishes and provide a minimal visual impact. Our flush mounted covers provide flawless integration with the adjacent floor finishes, resulting in a smoother surface for wheeled equipment and foot traffic. Our gasketed models should be considered for areas requiring higher levels of sanitation and hygiene.

BUY NOW

All standard Restofit™ models can be purchased online at www.c-sgroup.com/buyejc

MODEL GFS Series

1-2" Joints



BUY NOW

MODEL DATA FLOOR TO FLOOR COVERS (Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
GFS 100	1.0"	0.75"	1.25"	4.31"
GFS 200	2.0"	1.50"	2.50"	5.13"

Standard Loading: 500lbs.

MODEL GFST Series

1-2" Joints



BUY NOW


MODEL DATA FLOOR TO FLOOR COVERS (Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
GFST 100	1.0"	0.75"	1.25"	4.31"
GFST 200	2.0"	1.50"	2.50"	5.13"

Standard Loading: 500lbs.

MODEL GFPS Series

1-2" Joints

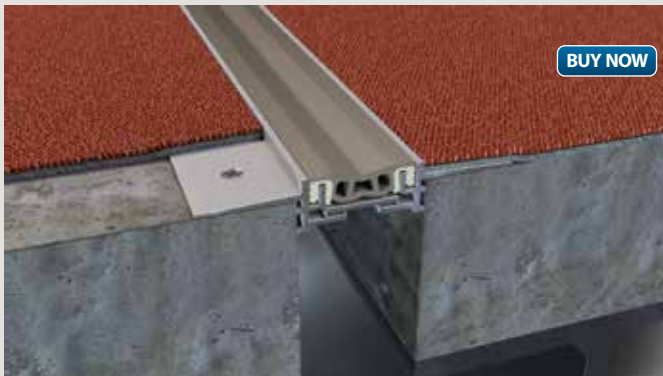

BUY NOW

MODEL DATA FLOOR TO FLOOR COVERS (Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
GFPS 100	1.0"	0.75"	1.25"	1.18"
GFPS 200	2.0"	1.50"	2.50"	1.88"

Standard Loading: 500lbs.

MODEL PC Series

1-4" Joints



BUY NOW

MODEL DATA FLOOR TO FLOOR COVERS (Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
PC 100	1.0"	0.0"	2.25"	3.75"
PC 200	2.0"	0.0"	3.75"	5.25"
PC 300	3.0"	0.0"	5.25"	6.75"
PC 400	4.5"	0.0"	6.75"	8.25"

Standard Loading: 500lbs.

For more information on these products, visit www.c-sgroup.com/expansion-joint-covers

New Restofit™ Models

BUY NOW

Purchase online at www.c-sgroup.com/buyejc

For more information on these products, visit www.c-sgroup.com/expansion-joint-covers

MODEL RFA Series

2-4" Joints



BUY NOW

Features & Benefits:

- Surface-mounted aluminum cover
- Quick & easy installation
- Low maintenance
- Engineered for high traffic areas
- Accommodates vertical offsets
- Gradual taper goes beyond ADA compliance

MODEL DATA FLOOR TO FLOOR COVERS

(Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
RFA 200	2.0"	1.75"	2.25"	8.25"
RFA 300	3.0"	2.625"	3.375"	9.25"
RFA 400	4.0"	3.375"	4.625"	10.25"

Standard Loading: Heavy-Duty

MODEL RFB Series

2-4" Joints



BUY NOW

Features & Benefits:

- Surface-mounted aluminum cover
- Quick & easy installation
- Self-centering center plate
- Optional waterstop available
- Accommodates varying joint widths

MODEL DATA FLOOR TO FLOOR COVERS

(Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
RFB 200	2.0"	1.25"	4.00"	6.0"
RFB 300	3.0"	1.25"	6.00"	7.0"
RFB 400	4.0"	1.25"	7.00"	8.0"

Standard Loading: 500lbs.

MODEL RFC Series

2-4" Joints



BUY NOW

Features & Benefits:

- Flush-mounted aluminum cover
- Quick & easy installation
- Minimal bump
- Self-centering center plate
- Optional waterstop available

MODEL DATA FLOOR TO FLOOR COVERS


(Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
RFC 200	2.0"	1.25"	4.00"	5.75"
RFC 300	3.0"	1.25"	6.00"	6.75"
RFC 400	4.0"	1.25"	7.00"	7.75"

Standard Loading: 500lbs.

MODEL RFD Series

2-4" Joints

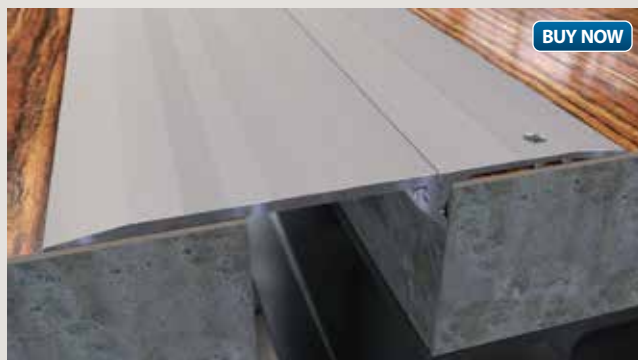

BUY NOW

Features & Benefits:

- Surface-mounted aluminum cover
- Quick & easy installation
- Low maintenance
- Resistant to rolling loads, distortion & wear
- Accommodates vertical offsets
- Gradual taper goes beyond ADA compliance

MODEL DATA FLOOR TO FLOOR COVERS

(Floor to wall available)

MODEL	JOINT WIDTH	MINIMUM OPENING	MAXIMUM OPENING	EXPOSED SURFACE
RFD 100	1.0"	0.75"	2.0"	9.375"
RFD 200	2.0"	0.75"	4.0"	9.375"
RFD 300	3.0"	0.75"	6.0"	11.375"
RFD 400	4.5"	0.75"	6.5"	11.375"

Standard Loading: Heavy-Duty

C/S Fire Barrier Options

REFLEX® 1"- 4" DETAILS



Stainless steel foil drape with block insulation affords maximum economy in material and installation. Wall barriers limited to 1"-4" joints and require no stainless steel foil drape.

NOMINAL JOINT WIDTH	C/S MODEL FLOORS	C/S MODEL GYPSUM WALL	C/S MODEL MASONRY WALL
1	RFX-1F	RFX-1W (GYP.)	RFX-1W (CONC)
	RFX-1F		RFX-1W (1 HR CONC)
2	RFX-2F	RFX-2W (GYP.)	RFX-2W (CONC)
	RFX-2F	RFX-2W (1 HR GYP.)	RFX-2W (1 HR CONC)
3	RFX-3F		
4	RFX-4F		

U.S. Patent #: 20050102941

MONOFLEX (OFX) 3"- 20" & MULTIFLEX® (MFX) 3"- 12"



"Sandwich" assembly of layers of stainless steel foil and insulation contained in a stainless steel mesh. Multiflex should be used where lateral shear is required in floor applications having a 3"-12" joint width.

NOMINAL JOINT WIDTH	C/S MODEL FLOORS	C/S MODEL GYPSUM WALL	C/S MODEL MASONRY WALL
3-20	OFX-3F-20F	OFX-3W-20W (GYP)	OFX-3W-20W (CONC)
3-12	MFX-3F-12F	OFX-3W-12W (GYP)	OFX-3W-12W (CONC)

NEED HELP WITH INSTALLATION?

C/S has qualified installers all over the country. Contact your local Sales Representative to find a qualified installer near you.

*To find your local Sales Representative,
visit our website at www.c-sgroup.com/sales-locations
or call us direct at 1-800-233-8493.*

There Is No Expansion Joint Damage We Cannot Fix.



Send us a picture(s) of your expansion joint or cover damage
and we will provide you with a solution.

Email us at: restofit@c-sgroup.com

6696 State Route 405, Muncy, Pennsylvania 17756

For more information, call 800.233.8493 or visit
www.c-sgroup.com/expansion-joint-covers



Construction Specialties™
Creating products that make buildings better

© Copyright 2013 Construction Specialties, Inc.

NEED A FLOOR GASKET REPLACED? SIZE IT UP AND LET US KNOW WHAT YOU NEED.
AVAILABLE IN BLACK, WHITE, GRAY & GREIGE

12V071 - Black



12V097 - White



12V066 - Gray



12V102 - Greige

